


# CORESTRIPPER.COM



## HYDRAULIC CORE STRIPPERS



MODEL CS-32

### **MODEL CS-18**

Maximum Roll: 18" Long x 13" Diameter  
Power: 3 HP, 208/220/440 Volt, 3 Phase  
Controls: 24 Volt DC, Dual Palm Buttons  
Cycle Time: 3 Seconds (Dry)  
Oil Reservoir: 10 Gallons

### **MODEL CS-32**

32" Long x 16" Diameter  
3 HP, 208/220/440 Volt, 3 Phase  
24 Volt DC, Dual Palm Buttons  
3 Seconds (Dry)  
10 Gallons

### **MODEL CS-42**

Maximum Roll: 42" Long x 23" Diameter  
Power: 5 HP, 208/220/440 Volt, 3 Phase  
Controls: 24 Volt DC, Dual Palm Buttons  
Cycle Time: 5 Seconds (Dry)  
Oil Reservoir: 10 Gallons

### **MODEL CS-54**

54" Long x 23" Diameter  
5 HP, 208/220/440 Volt, 3 Phase  
24 Volt DC, Dual Palm Buttons  
5 Seconds (Dry)  
10 Gallons

### **MODEL CS-66**

Maximum Roll: 66" Long x 23" Diameter  
Power: 5 HP, 208/220/440 Volt, 3 Phase  
Controls: 24 Volt DC, Dual Palm Buttons  
Cycle Time: 5 Seconds (Dry)  
Oil Reservoir: 10 Gallons

*\*Machines are designed for 3" I.D. Cores*




MODEL CS-66

**\*Note: AW46 Hydraulic Oil is NOT Included**

- Hydraulically Powered “Shear-Action” Blade
- Cut Material Falls Directly into Container Below
- Dual Palm Button Operation Features Anti-Repeat Interlock
- Blade Carrier Attachment Helps you Safely Replace Dull Blades
  - Available on CS-42, CS-54, and CS-66
- Jack Screw Makes Cut Depth Adjustments Easy and Fast, without Resetting Limit Switches
- Available in Sizes for Stripping Up to 66” Cores in 23” Diameter
- Easy Loading, Swing Out Mandrel with Electrical Interlock Keeps Hands Away from Blade at All Times
  - Available on CS-42, CS-54, and CS-66

We Recommend One Spare Blade be Purchased with Each Machine Ordered to Eliminate Down Time while Sharpening the Blade. Blades are Manufactured from D2 Tool Hardened Steel.

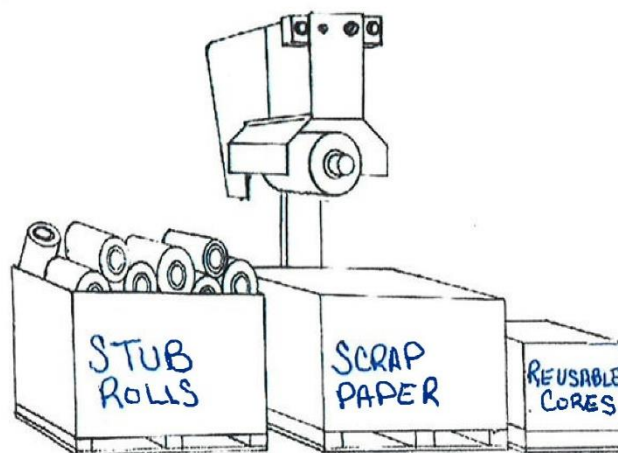

**DON'T WASTE IT, STRIP IT, WITH CORESTRIPPER.COM**

Ph: (267) 272-5089 • [Sales@corestripper.com](mailto:Sales@corestripper.com) • [www.corestripper.com](http://www.corestripper.com)